

8-13-2019

Extendibility Limits the Performance of Quantum Processors

Eneet Kaur

Louisiana State University

Siddhartha Das

Louisiana State University

Mark M. Wilde

Louisiana State University

Andreas Winter

Universitat Autònoma de Barcelona

Follow this and additional works at: https://digitalcommons.lsu.edu/physics_astronomy_pubs

Recommended Citation

Kaur, E., Das, S., Wilde, M., & Winter, A. (2019). Extendibility Limits the Performance of Quantum Processors. *Physical Review Letters*, 123 (7) <https://doi.org/10.1103/PhysRevLett.123.070502>

This Article is brought to you for free and open access by the Department of Physics & Astronomy at LSU Digital Commons. It has been accepted for inclusion in Faculty Publications by an authorized administrator of LSU Digital Commons. For more information, please contact ir@lsu.edu.



CHORUS

This is the accepted manuscript made available via CHORUS. The article has been published as:

Extendibility Limits the Performance of Quantum Processors

Eneet Kaur, Siddhartha Das, Mark M. Wilde, and Andreas Winter

Phys. Rev. Lett. **123**, 070502 — Published 13 August 2019

DOI: [10.1103/PhysRevLett.123.070502](https://doi.org/10.1103/PhysRevLett.123.070502)

Extendibility limits the performance of quantum processors

Eneet Kaur,¹ Siddhartha Das,¹ Mark M. Wilde,^{1,2} and Andreas Winter³

¹*Hearne Institute for Theoretical Physics, Department of Physics and Astronomy,
Louisiana State University, Baton Rouge, Louisiana 70803, USA*

²*Center for Computation and Technology, Louisiana State University, Baton Rouge, Louisiana 70803, USA*

³*ICREA & Física Teòrica: Informació i Fenòmens Quàntics, Departament de Física,
Universitat Autònoma de Barcelona, ES-08193 Bellaterra (Barcelona), Spain*

(Dated: February 11, 2019)

Resource theories in quantum information science are helpful for the study and quantification of the performance of information-processing tasks that involve quantum systems. These resource theories also find applications in other areas of study; e.g., the resource theories of entanglement and coherence have found use and implications in the study of quantum thermodynamics and memory effects in quantum dynamics. In this paper, we introduce the resource theory of unextendibility, which is associated to the inability of extending quantum entanglement in a given quantum state to multiple parties. The free states in this resource theory are the k -extendible states, and the free channels are k -extendible channels, which preserve the class of k -extendible states. We make use of this resource theory to derive non-asymptotic, upper bounds on the rate at which quantum communication or entanglement preservation is possible by utilizing an arbitrary quantum channel a finite number of times, along with the assistance of k -extendible channels at no cost. We then show that the bounds obtained are significantly tighter than previously known bounds for quantum communication over both the depolarizing and erasure channels.

Introduction—Recent years have seen progress in the development of programmable quantum computers and information processing devices; several groups are actively developing superconducting quantum processors [1] and satellite-to-ground quantum key distribution [2]. It is thus pertinent to establish benchmarks on the information-processing capabilities of quantum devices that are able to process a finite number of qubits reliably. Experimentalists can then employ these benchmarks to evaluate how far they are from achieving the fundamental limitations on performance.

In this paper, we first develop a resource theory of unextendibility and then apply it to bound the performance of quantum processors. In particular, the resource theory of unextendibility leads to non-asymptotic upper bounds on the rate at which entanglement can be preserved when using a given quantum channel a finite number of times. We then apply this general bound to depolarizing and erasure channels, which are common models of noise in quantum processors. For these channels, we find that our bounds are significantly tighter than previously known non-asymptotic bounds from [3, 4].

The resource theory of unextendibility can be understood as a relaxation of the well known resource theory of entanglement [5, 6], and it is a relaxation alternative to the resource theory of negative partial transpose states from [7, 8], in which the free states are the positive partial transpose (PPT) states and the free channels are completely PPT-preserving channels. In the resource theory of entanglement, the free states are the separable states, those not having any entanglement at all. Any separable state σ_{AB} can be written as $\sigma_{AB} = \sum_x p(x) \tau_A^x \otimes \omega_B^x$, where $p(x)$ is a probability distribution and $\{\tau_A^x\}_x$ and $\{\omega_B^x\}_x$ are sets of states; the free channels are those that can be performed by local operations and classical communication (LOCC) [5, 9]. An LOCC channel $\mathcal{L}_{AB \rightarrow A'B'}$ is a separable super-operator (although the converse is not true), and can hence be written as $\mathcal{L}_{AB \rightarrow A'B'} = \sum_y \mathcal{E}_{A \rightarrow A'}^y \otimes \mathcal{F}_{B \rightarrow B'}^y$, where $\{\mathcal{E}_{A \rightarrow A'}^y\}_y$ and $\{\mathcal{F}_{B \rightarrow B'}^y\}_y$ are

sets of completely positive (CP) maps such that $\mathcal{L}_{AB \rightarrow A'B'}$ is trace preserving. A special kind of LOCC channel is a one-way (1W-) LOCC channel from A to B , in which Alice performs a quantum instrument, sends the classical outcome to Bob, who then performs a quantum channel conditioned on the classical outcome received from Alice. As such, any 1W-LOCC channel takes the form stated above, except that $\{\mathcal{E}_{A \rightarrow A'}^y\}_y$ is a set of CP maps such that the sum map $\sum_y \mathcal{E}_{A \rightarrow A'}^y$ is trace preserving, while $\{\mathcal{F}_{B \rightarrow B'}^y\}_y$ is a set of quantum channels.

The set of free states in the resource theory of unextendibility is larger than the set of free states in the resource theory of entanglement. By relaxing the resource theory of entanglement in this way, we obtain tighter, non-asymptotic bounds on the entanglement transmission rates of a quantum channel.

Before we begin with our development, we note here that detailed proofs of all statements that follow are given in our companion paper [10].

Resource theory of unextendibility—In the resource theory of unextendibility, there is implicitly a positive integer $k \geq 2$, with respect to which the theory is defined. The free states in this resource theory are the k -extendible states [11–13], a prominent notion in quantum information and entanglement theory that we recall now. For a positive integer $k \geq 2$, a bipartite state ρ_{AB} is k -extendible with respect to system B if

1. **(State Extension)** There exists a state $\omega_{AB_1 \dots B_k}$ that extends ρ_{AB} , so that $\text{Tr}_{B_2 \dots B_k} \{\omega_{AB_1 \dots B_k}\} = \rho_{AB}$, with systems B_1 through B_k each isomorphic to system B of ρ_{AB} .
2. **(Permutation Invariance)** The extension state $\omega_{AB_1 \dots B_k}$ is invariant with respect to permutations of the B systems, in the sense that $\omega_{AB_1 \dots B_k} = W_{B_1 \dots B_k}^\pi \omega_{AB_1 \dots B_k} W_{B_1 \dots B_k}^{\pi^\dagger}$, where $W_{B_1 \dots B_k}^\pi$ is a unitary representation of the permutation $\pi \in S_k$, with S_k denoting the symmetric group.

To give some physical context to the definition of a k -extendible state, suppose that Alice and Bob share a bipartite

state and that Bob subsequently mixes his system and the vacuum state at a 50:50 beamsplitter. Then the resulting state of Alice's system and one of the outputs of the beamsplitter is a two-extendible state by construction. As a generalization of this, suppose that Bob sends his system through the N -splitter of [14, Eq. (10)], with the other input ports set to the vacuum state. Then the state of Alice's system and one of the outputs of the N -splitter is N -extendible by construction. One could also physically realize k -extendible states in a similar way by means of approximate quantum cloning machines [15].

It is worthwhile to mention that there are free states in the resource theory of unextendibility that are not free in the resource theory of entanglement. For example, if we send one share of the maximally entangled state Φ_{AB} through a 50% erasure channel [16], then the resulting state $\frac{1}{2}(\Phi_{AB} + I_A/2 \otimes |e\rangle\langle e|_B)$ is a two-extendible state, and is thus free in the resource theory of unextendibility for $k = 2$. However, this state has distillable entanglement via LOCC [17], and so it is not free in the resource theory of entanglement.

Let $\text{EXT}_k(A; B)$ denote the set of k -extendible states, where with this notation and as above, we take it as implicit that the system B is being extended. The k -extendible states are a relaxation of the set of separable (unentangled) states, in the sense that a separable state is k -extendible for any positive integer $k \geq 2$. Furthermore, if a state ρ_{AB} is entangled, then there exists some k for which ρ_{AB} is not k -extendible, and ρ_{AB} is not ℓ -extendible for all $\ell \geq k$ [12, 13].

We define the free channels in the resource theory of unextendibility to be bipartite channels that satisfy two constraints generalizing those given above for the free states. Recall that a bipartite channel $\mathcal{N}_{AB \rightarrow A'B'}$ has two input systems A and B and two output systems A' and B' . The systems A and A' are held by a single party Alice, and the systems B and B' are held by another party Bob. It could be the case that any of these systems encompass a number of smaller subsystems, and we make use of this in what follows. We define a bipartite channel $\mathcal{N}_{AB \rightarrow A'B'}$ to be k -extendible if

1. (Channel Extension) There exists a quantum channel $\mathcal{M}_{AB_1 \dots B_k \rightarrow A'B'_1 \dots B'_k}$ that extends $\mathcal{N}_{AB \rightarrow A'B'}$, in the sense that the following equality holds for all quantum states $\theta_{AB_1 \dots B_k}$: $\text{Tr}_{B'_2 \dots B'_k} \{ \mathcal{M}_{AB_1 \dots B_k \rightarrow A'B'_1 \dots B'_k}(\theta_{AB_1 \dots B_k}) \} = \mathcal{N}_{AB \rightarrow A'B'}(\theta_{AB_1})$, with $B_1 \dots B_k$ each isomorphic to B , and $B'_1 \dots B'_k$ each isomorphic to B' .

2. (Permutation Covariance) The extension channel $\mathcal{M}_{AB_1 \dots B_k \rightarrow A'B'_1 \dots B'_k}$ is covariant with respect to permutations of the input B and output B' systems, in the sense that the following equality holds for all quantum states $\theta_{AB_1 \dots B_k}$: $\mathcal{M}_{AB_1 \dots B_k \rightarrow A'B'_1 \dots B'_k}(W_{B_1 \dots B_k}^\pi \theta_{AB_1 \dots B_k} W_{B_1 \dots B_k}^{\pi^\dagger}) = W_{B'_1 \dots B'_k}^\pi \mathcal{M}_{AB_1 \dots B_k \rightarrow A'B'_1 \dots B'_k}(\theta_{AB_1 \dots B_k}) W_{B'_1 \dots B'_k}^{\pi^\dagger}$, where $W_{B_1 \dots B_k}^\pi$ and $W_{B'_1 \dots B'_k}^\pi$ are unitary representations of the permutation $\pi \in S_k$.

The first condition above can be understood as a no-signaling condition. That is, it implies that it is impossible for the parties controlling the $B_2 \dots B_k$ systems to communicate to the parties holding systems $A'B'_1$.

We advocate that our definition above is a natural channel generalization of state extendibility, since the reduced channel $\mathcal{N}_{AB \rightarrow A'B'}$ of the channel extension $\mathcal{M}_{AB_1 \dots B_k \rightarrow A'B'_1 \dots B'_k}$ is defined in an unambiguous way only when we impose a no-signaling constraint. Furthermore, the above definition is quite natural in the resource theory of unextendibility developed here, as evidenced by the following theorem:

Theorem 1 *Let $\rho_{AB} \in \text{EXT}_k(A; B)$, and let $\mathcal{N}_{AB \rightarrow A'B'}$ be a k -extendible channel. Then the output state $\mathcal{N}_{AB \rightarrow A'B'}(\rho_{AB})$ is k -extendible.*

The above theorem is fundamental for the resource theory of unextendibility, indicating that the k -extendible channels are free, as they preserve the free states.

There are several interesting classes of k -extendible channels that we can consider. Even if it might seem trivial, we should mention that a particular kind of k -extendible channel is in fact a k -extendible state, in which the input systems A and B are trivial. Thus, k -extendible channels can generate k -extendible states.

Any 1W-LOCC channel is k -extendible for all $k \geq 2$, similar to the way in which any separable state is k -extendible for all $k \geq 2$. Thus, a 1W-LOCC channel is free in the resource theory of unextendibility. The fact that a 1W-LOCC channel takes a k -extendible input state to a k -extendible output state had already been observed for the special case $k = 2$ in [18].

Quantifying unextendibility—In any resource theory, it is pertinent to quantify the resourcefulness of the resource states and channels. It is desirable for any quantifier to be non-negative, attain its minimum for the free states and channels, and be monotone under the action of a free channel [19]. With this in mind, we define the k -unextendible generalized divergence of an arbitrary density operator ρ_{AB} as follows:

$$\mathbf{E}_k(A; B)_\rho = \inf_{\sigma_{AB} \in \text{EXT}_k(A; B)} \mathbf{D}(\rho_{AB} \| \sigma_{AB}), \quad (1)$$

where $\mathbf{D}(\rho \| \sigma)$ denotes a generalized divergence [20, 21], which is any quantifier of the distinguishability of states ρ and σ that is monotone under the action of a quantum channel. Special cases of the quantifier in (1) were previously defined in [18, 22] (relative entropy to two-extendible states and to k -extendible states, respectively), [23] (best two-extendible approximation, related to max-relative entropy of unextendibility defined here), and [24] (maximum k -extendible fidelity).

Particular examples of generalized divergences between states ρ and σ are the ε -hypothesis-testing divergence $D_h^\varepsilon(\rho \| \sigma)$ [25, 26], and the max-relative entropy $D_{\max}(\rho \| \sigma)$ [27, 28], where for $\varepsilon \in [0, 1]$,

$$D_h^\varepsilon(\rho \| \sigma) := -\log_2 \inf_{\Lambda \in [0, I]} \{ \text{Tr}\{\Lambda \sigma\} : \text{Tr}\{\Lambda \rho\} \geq 1 - \varepsilon \},$$

and $D_{\max}(\rho \| \sigma) := \inf\{\lambda : \rho \leq 2^\lambda \sigma\}$ in the case that $\text{supp}(\rho) \subseteq \text{supp}(\sigma)$, and otherwise $D_{\max}(\rho \| \sigma) = +\infty$.

Information-processing tasks—Now that we have established the free states and channels in the resource theory of unextendibility, we are ready to discuss tasks that can be performed in it. We consider two main tasks here: entanglement

distillation and quantum communication with the assistance of k -extendible channels. The goal of these protocols is to use many copies of a bipartite state or many invocations of a quantum channel, along with the free assistance of k -extendible channels, in order to generate a high-fidelity maximally entangled state with as much entanglement as possible. This kind of task was defined and developed in [29], albeit with the assistance of a particular kind of k -extendible channel and only the case $k = 2$ was considered there, generalizing the usual notion of entanglement distillation and quantum communication protocols from [5, 30–36].

Let $n, M \in \mathbb{Z}^+$ and $\varepsilon \in [0, 1]$. Let ρ_{AB} be a bipartite state. An (n, M, ε) entanglement distillation protocol assisted by k -extendible channels begins with Alice and Bob sharing n copies of ρ_{AB} , to which they apply a k -extendible channel $\mathcal{K}_{A^n B^n \rightarrow M_A M_B}$, where it is understood that this is a bipartite channel with Alice possessing systems A^n and M_A and Bob possessing systems B^n and M_B . The resulting state satisfies the following performance condition:

$$F(\mathcal{K}_{A^n B^n \rightarrow M_A M_B}(\rho_{AB}^{\otimes n}), \Phi_{M_A M_B}) \geq 1 - \varepsilon, \quad (2)$$

where $\Phi_{M_A M_B} := \frac{1}{M} \sum_{m, m'} |m\rangle\langle m'|_{M_A} \otimes |m\rangle\langle m'|_{M_B}$ is a maximally entangled state of Schmidt rank M and $F(\omega, \tau) := \|\sqrt{\omega}\sqrt{\tau}\|_1^2$ is the quantum fidelity [37]. Let $D^{(k)}(\rho_{AB}, n, \varepsilon)$ denote the non-asymptotic distillable entanglement with the assistance of k -extendible channels; i.e., $D^{(k)}(\rho_{AB}, n, \varepsilon)$ is equal to the maximum value of $\frac{1}{n} \log_2 M$ such that there exists an (n, M, ε) protocol for ρ_{AB} satisfying (2).

We define two different variations of quantum communication, with one simpler and one more involved. Let $\mathcal{N}_{A \rightarrow B}$ denote a quantum channel. In the simpler version, an (n, M, ε) entanglement transmission protocol assisted by a k -extendible post-processing begins with Alice preparing a maximally entangled state $\Phi_{RA'}$ of Schmidt rank M . She applies a quantum channel $\mathcal{E}_{A' \rightarrow A^n}$, which serves as an encoding and leads to a state $\rho_{RA^n} := \mathcal{E}_{A' \rightarrow A^n}(\Phi_{RA'})$. She transmits the systems $A^n := A_1 \cdots A_n$ using the channel $\mathcal{N}_{A \rightarrow B}^{\otimes n}$. Alice and Bob then perform a k -extendible channel $\mathcal{K}_{RB^n \rightarrow M_A M_B}$, such that

$$F(\mathcal{K}_{RB^n \rightarrow M_A M_B}(\mathcal{N}_{A \rightarrow B}^{\otimes n}(\rho_{RA^n})), \Phi_{M_A M_B}) \geq 1 - \varepsilon. \quad (3)$$

Let $Q_1^{(k)}(\mathcal{N}_{A \rightarrow B}, n, \varepsilon)$ denote the non-asymptotic quantum capacity assisted by a k -extendible post-processing; i.e., $Q_1^{(k)}(\mathcal{N}_{A \rightarrow B}, n, \varepsilon)$ is the maximum value of $\frac{1}{n} \log_2 M$ such that there exists an (n, M, ε) protocol for $\mathcal{N}_{A \rightarrow B}$ satisfying (3).

For the cases of entanglement distillation and the simpler version of entanglement transmission, note that an (n, M, ε) entanglement distillation protocol for the state ρ_{AB} is a $(1, M, \varepsilon)$ protocol for the state $\rho_{AB}^{\otimes n}$ and vice versa. Similarly, an (n, M, ε) entanglement transmission protocol for the channel $\mathcal{N}_{A \rightarrow B}$ is a $(1, M, \varepsilon)$ protocol for the channel $\mathcal{N}_{A \rightarrow B}^{\otimes n}$ and vice versa.

In the more involved version of entanglement transmission, every channel use is interleaved with a k -extendible channel, similar to the protocols considered in [38–40]. Specifically, the protocol is a special case of one discussed in [40] for general resource theories. We do not discuss these protocols in

detail here, but we simply note that, for an (n, M, ε) quantum communication protocol assisted by k -extendible channels, the performance criterion is that the final state of the protocol should have fidelity $\geq 1 - \varepsilon$ to a maximally entangled state $\Phi_{M_A M_B}$ of Schmidt rank M . Let $Q_{\text{II}}^{(k)}(\mathcal{N}_{A \rightarrow B}, n, \varepsilon)$ denote the non-asymptotic quantum capacity assisted by k -extendible channels; i.e., $Q_{\text{II}}^{(k)}(\mathcal{N}_{A \rightarrow B}, n, \varepsilon)$ is the maximum value of $\frac{1}{n} \log_2 M$ such that there exists an (n, M, ε) protocol for $\mathcal{N}_{A \rightarrow B}$ as described for the more involved case above.

Theorem 2 *The following bound holds for all $k \geq 2$ and for any $(1, M, \varepsilon)$ entanglement transmission protocol that uses a channel \mathcal{N} assisted by a k -extendible post-processing:*

$$-\log_2 \left[\frac{1}{M} + \frac{1}{k} - \frac{1}{Mk} \right] \leq \sup_{\psi_{RA}} E_k^\varepsilon(R; B)_\tau, \quad (4)$$

where $E_k^\varepsilon(R; B)_\rho := \inf_{\sigma_{RB} \in \text{EXT}_k(R; B)} D_h^\varepsilon(\rho_{RB} \| \sigma_{RB})$, $\tau_{RB} := \mathcal{N}_{A \rightarrow B}(\psi_{RA})$, and the optimization is with respect to pure states ψ_{RA} such that $R \simeq A$. The following bound holds for all $k \geq 2$ and for any $(1, M, \varepsilon)$ entanglement distillation protocol that uses a quantum state ρ_{AB} assisted by a k -extendible post-processing:

$$-\log_2 \left[\frac{1}{M} + \frac{1}{k} - \frac{1}{Mk} \right] \leq E_k^\varepsilon(A; B)_\rho. \quad (5)$$

The proof of the above theorem follows by employing the fact that E_k^ε does not increase under the action of a k -extendible channel, because the extendibility of a k -extendible state does not change under the action of $U \otimes U^*$ for a unitary U , and by employing [41, Theorem III.8].

Theorem 3 *The following bound holds for all $k \geq 2$ and for any (n, M, ε) quantum communication protocol employing n uses of a channel \mathcal{N} interleaved by k -extendible channels:*

$$-\log_2 \left[\frac{1}{M} + \frac{1}{k} - \frac{1}{Mk} \right] \leq n E_k^{\max}(\mathcal{N}) + \log_2 \left(\frac{1}{1 - \varepsilon} \right),$$

where

$$E_k^{\max}(\mathcal{N}) := \sup_{\psi_{RA}} \inf_{\sigma_{RB} \in \text{EXT}_k(R; B)} D_{\max}(\tau_{RB} \| \sigma_{RB}),$$

$\tau_{RB} := \mathcal{N}_{A \rightarrow B}(\psi_{RA})$, and the optimization is with respect to pure states ψ_{RA} with $|R| = |A|$.

We note here that special cases of the entanglement distillation and quantum communication protocols described above occur when the k -extendible assisting channels are taken to be 1W-LOCC channels. As such, $D^{(k)}(\rho_{AB}, n, \varepsilon)$, $Q_1^{(k)}(\mathcal{N}_{A \rightarrow B}, n, \varepsilon)$, and $Q_{\text{II}}^{(k)}(\mathcal{N}_{A \rightarrow B}, n, \varepsilon)$ are upper bounds on the non-asymptotic distillable entanglement and capacities when 1W-LOCC channels are available for assistance.

Pretty strong converse for antidegradable channels—As a direct application of Theorem 3, we revisit the “pretty strong converse” of [42] for antidegradable channels. Recall that a channel $\mathcal{N}_{A \rightarrow B}$ is antidegradable [43, 44] if the output state $\mathcal{N}_{A \rightarrow B}(\rho_{RA})$ is two-extendible for any input state ρ_{RA} . Due to this property, antidegradable channels have zero asymptotic quantum capacity [17, 45]. Theorem 3 implies the following bound for the non-asymptotic case:

Corollary 1 Fix $\varepsilon \in [0, 1/2)$. The following bound holds for any (n, M, ε) quantum communication protocol employing n uses of an antidegradable channel \mathcal{N} interleaved by two-extendible channels: $\frac{1}{n} \log_2 M \leq \frac{1}{n} \log_2 \left(\frac{1}{1-2\varepsilon} \right)$.

We conclude from the above inequality that, for an antidegradable channel, there is a strong limitation on its ability to generate entanglement whenever the error parameter $\varepsilon < \frac{1}{2}$, as is usually desired for applications in quantum computation. We also remark that the bound above is tighter than related bounds given in [42], and furthermore, the bound applies to quantum communication protocols assisted by interleaved two-extendible channels, which were not considered in [42].

Limitations on quantum devices—In practice, the evolution effected by quantum processors is never a perfect unitary process. There is always some undesirable interaction with the environment, the latter of which is inaccessible to the processor. Furthermore, there are practical limitations on the ability to construct perfect unitary gates [46]. The depolarizing and erasure channels are two classes of noisy models for qubit quantum processors that are widely considered (see [47–49]).

Both families of channels mentioned above are covariant channels [50]; i.e., these channels are covariant with respect to a group G with representations given by a unitary one-design. Thus, these channels can be simulated using 1W-LOCC with the Choi states as the resource states [51, Section VII]. Using this symmetry and the monotonicity of the unextendible generalized divergence under 1W-LOCC, we conclude that the optimal input state to a covariant channel \mathcal{N} , with respect to the upper bound in Theorem 2, is a maximally entangled state Φ_{RA} . Also, for any (n, M, ε) quantum communication protocol conducted over a covariant channel and assisted by any k -extendible channel, the optimal input state is $\Phi_{RA}^{\otimes n}$ and $Q_{\text{II}}^{(k)}(\mathcal{N}_{A \rightarrow B}, n, \varepsilon) = Q_{\text{I}}^{(k)}(\mathcal{N}_{A \rightarrow B}, n, \varepsilon)$; i.e., an upper bound on non-asymptotic quantum capacity $Q_{\text{II}}^{(k)}$ is given by Theorem 2.

A qubit depolarizing channel acts on an input state ρ as $\mathcal{D}_{A \rightarrow B}^p(\rho) = (1-p)\rho + \frac{p}{3}(X\rho X + Y\rho Y + Z\rho Z)$, where $p \in [0, 1]$ is the depolarizing parameter, and X, Y , and Z are Pauli operators. The best known upper bound on the asymptotic quantum capacity of this channel for values of $p \in [0, \frac{1}{4})$ was recently derived in [52, 53], and this channel has zero asymptotic quantum capacity for $p \in [\frac{1}{4}, 1]$ [54, 55].

With the goal of bounding the non-asymptotic quantum capacity of \mathcal{D}^p , we make a particular choice of the k -extendible state for E_k^ε (which need not be optimal) to be a tensor power of the isotropic states $\sigma_{AB}^{\varepsilon(t,2)}$, which is similar to what was done in [3]. The inequality in Theorem 2 then reduces to

$$\frac{1}{n} \log_2 M \leq \frac{1}{n} \log_2 \left(1 - \frac{1}{k} \right) - \frac{1}{n} \log_2 \left(f(\varepsilon, p, t) - \frac{1}{k} \right), \quad (6)$$

where $f(\varepsilon, p, t) = 2^{-D_h^\varepsilon(\{1-p, p\}^{\otimes n} \| \{t, 1-t\}^{\otimes n})}$ and $\{1-p, p\}$ denotes a Bernoulli distribution. The optimal measurement (Neyman-Pearson test) for the resulting hypothesis testing relative entropy between Bernoulli distributions is then well known [56] (see also [57]), giving an explicit upper bound on the rate $\frac{1}{n} \log_2 M$. Figure 1 compares various upper bounds

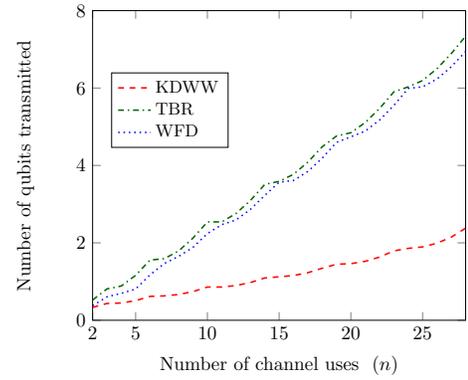


FIG. 1. Upper bounds on the number of qubits that can be reliably transmitted over a depolarizing channel with $p = 0.15$, and $\varepsilon = 0.05$. The red dashed line is from Theorem 2. The green dash-dotted and blue dotted lines are upper bounds from [3] and [4], respectively.

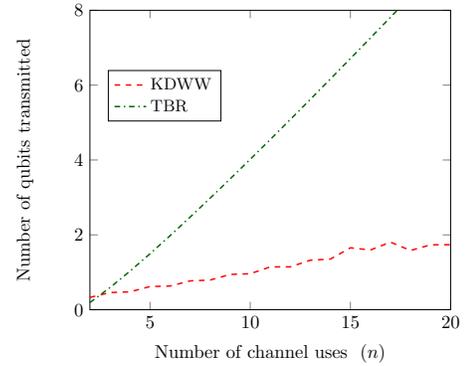


FIG. 2. Upper bounds on the number of qubits that can be reliably transmitted over an erasure channel with $p = 0.35$, and $\varepsilon = 0.05$. The red dashed line is the bound from Theorem 2. The green dash-dotted line is an upper bound from [3].

on the number of qubits that can be reliably transmitted over n uses of the depolarizing channel. The bounds plotted are the ones derived from Theorem 2 (labeled “KDWW”), as well as two other known upper bounds on non-asymptotic quantum capacities [3, 4]. The figure demonstrates that the bounds coming from the resource theory of unextendibility are significantly tighter than those from [3, 4]. Note that (6) converges to the upper bound from [3, 58] in the limit $k \rightarrow \infty$.

A qubit erasure channel acts on an input state ρ as $\mathcal{E}_{A \rightarrow B}^p(\rho_A) = (1-p)\rho_B + p|e\rangle\langle e|_B$ [16], where $p \in [0, 1]$ is the erasure probability, and the erasure state $|e\rangle\langle e|$ is orthogonal to the input Hilbert space. We employ the symmetries of the erasure channel to make a particular choice of the k -extendible state for E_k^ε . Theorem 2 gives upper bounds on the number of qubits that can be reliably transmitted over n uses of the erasure channel. The bounds that we obtain are not necessarily optimal, but they still are significantly tighter than those from [3]. See Figure 2.

Discussion—In this paper, we developed the resource theory of unextendibility and discussed limits that it places on the performance of finite-sized quantum processors. The free

states in this resource theory are k -extendible states, and the free channels are the k -extendible channels. We determined non-asymptotic upper bounds on the rate at which qubits can be transmitted over a finite number of uses of a given quantum channel. The bounds coming from the resource theory of unextendibility are significantly tighter than those in [3, 4] for depolarizing and erasure channels.

It would be interesting to explore the resource theory of unextendibility further. One plausible direction would be to use this resource theory to obtain non-asymptotic converse bounds on the entanglement distillation rate of bipartite quantum interactions and compare with the bounds obtained in [59, 60]. Another direction is to analyze the bounds in Theorem 2 for other noise models that are practically relevant. Finally, it remains open to link the bounds developed here with the open problem of finding a strong converse for the quantum capacity of degradable channels [42]. To solve that problem, recall that one contribution of [42] was to reduce the question of the strong converse of degradable channels to that of establishing the strong converse for symmetric channels.

Note—We noticed the related work “Optimising practical entanglement distillation” by Rozpedek *et al.* recently posted as arXiv:1803.10111, which like us uses extendibility to address entanglement distillation, and which presents results that are complementary to ours.

ACKNOWLEDGMENTS

We thank Sumeet Khatri, Vishal Katariya, Felix Lediztky, and Stefano Mancini for insightful discussions. SD acknowledges support from the LSU Graduate School Economic Development Assistantship. EK and MMW acknowledge support from the US Office of Naval Research and the National Science Foundation under Grant No. 1350397. Andreas Winter acknowledges support from the ERC Advanced Grant IRQUAT, the Spanish MINECO, projects FIS2013-40627-P and FIS2016-86681-P, with the support of FEDER funds, and the Generalitat de Catalunya, CIRIT project 2014-SGR-966.

-
- [1] Jay M. Gambetta, Jerry M. Chow, and Matthias Steffen, “Building logical qubits in a superconducting quantum computing system,” *npj Quantum Information* **3**, 2 (2017).
- [2] Sheng-Kai Liao, Wen-Qi Cai, Wei-Yue Liu, Liang Zhang, Yang Li, Ji-Gang Ren, Juan Yin, Qi Shen, Yuan Cao, Zheng-Ping Li, Feng-Zhi Li, Xia-Wei Chen, Li-Hua Sun, Jian-Jun Jia, Jin-Cai Wu, Xiao-Jun Jiang, Jian-Feng Wang, Yong-Mei Huang, Qiang Wang, Yi-Lin Zhou, Lei Deng, Tao Xi, Lu Ma, Tai Hu, Qiang Zhang, Yu-Ao Chen, Nai-Le Liu, Xiang-Bin Wang, Zhen-Cai Zhu, Chao-Yang Lu, Rong Shu, Cheng-Zhi Peng, Jian-Yu Wang, and Jian-Wei Pan, “Satellite-to-ground quantum key distribution,” *Nature* **549**, 43–47 (2017), arXiv:1707.00542.
- [3] Marco Tomamichel, Mario Berta, and Joseph M. Renes, “Quantum coding with finite resources,” *Nature Communications* **7**, 11419 (2016), arXiv:1504.04617.
- [4] Xin Wang, Kun Fang, and Runyao Duan, “Semidefinite programming converse bounds for quantum communication,” to appear in *IEEE Transactions on Information Theory* (2019), 10.1109/TIT.2018.2874031, arXiv:1709.00200.
- [5] Charles H. Bennett, David P. DiVincenzo, John A. Smolin, and William K. Wootters, “Mixed-state entanglement and quantum error correction,” *Physical Review A* **54**, 3824–3851 (1996), arXiv:quant-ph/9604024.
- [6] Ryszard Horodecki, Paweł Horodecki, Michał Horodecki, and Karol Horodecki, “Quantum entanglement,” *Review of Modern Physics* **81**, 865–942 (2009), arXiv:quant-ph/0702225.
- [7] Eric M. Rains, “Bound on distillable entanglement,” *Physical Review A* **60**, 179–184 (1999), arXiv:quant-ph/9809082.
- [8] Eric M. Rains, “A semidefinite program for distillable entanglement,” *IEEE Transactions on Information Theory* **47**, 2921–2933 (2001), arXiv:quant-ph/0008047.
- [9] Eric Chitambar, Debbie Leung, Laura Mančinska, Maris Ozols, and Andreas Winter, “Everything you always wanted to know about LOCC (but were afraid to ask),” *Communications in Mathematical Physics* **328**, 303–326 (2014), arXiv:1210.4583.
- [10] Eneet Kaur, Siddhartha Das, Mark M. Wilde, and Andreas Winter, (2018), arXiv:1803.10710.
- [11] Reinhard F. Werner, “An application of Bell’s inequalities to a quantum state extension problem,” *Letters in Mathematical Physics* **17**, 359–363 (1989).
- [12] Andrew C. Doherty, Pablo A. Parrilo, and Federico M. Spedalieri, “Distinguishing separable and entangled states,” *Physical Review Letters* **88**, 187904 (2002), arXiv:quant-ph/0112007.
- [13] Andrew C. Doherty, Pablo A. Parrilo, and Federico M. Spedalieri, “Complete family of separability criteria,” *Physical Review A* **69**, 022308 (2004), arXiv:quant-ph/0308032.
- [14] Peter van Loock and Samuel L. Braunstein, “Multipartite entanglement for continuous variables: A quantum teleportation network,” *Physical Review Letters* **84**, 3482–3485 (2000), arXiv:quant-ph/9906021.
- [15] Valerio Scarani, Sofyan Iblisdir, Nicolas Gisin, and Antonio Acín, “Quantum cloning,” *Reviews of Modern Physics* **77**, 1225–1256 (2005), arXiv:quant-ph/0511088.
- [16] Markus Grassl, Thomas Beth, and Thomas Pellizzari, “Codes for the quantum erasure channel,” *Physical Review A* **56**, 33 (1997), arXiv:quant-ph/9610042.
- [17] Charles H. Bennett, David P. DiVincenzo, and John A. Smolin, “Capacities of quantum erasure channels,” *Physical Review Letters* **78**, 3217–3220 (1997), arXiv:quant-ph/9701015.
- [18] Marcin L. Nowakowski and Paweł Horodecki, “A simple test for quantum channel capacity,” *Journal of Physics A: Mathematical and Theoretical* **42**, 135306 (2009), arXiv:quant-ph/0503070.
- [19] Fernando G. S. L. Brandão and Gilad Gour, “Reversible framework for quantum resource theories,” *Physical Review Letters* **115**, 070503 (2015), arXiv:1502.03149.
- [20] Yuri Polyanskiy and Sergio Verdú, “Arimoto channel coding converse and Rényi divergence,” in *Proceedings of the 48th Annual Allerton Conference on Communication, Control, and Computation* (2010) pp. 1327–1333.
- [21] Naresh Sharma and Naqeeb Ahmad Warsi, “On the strong converses for the quantum channel capacity theorems,” (2012), arXiv:1205.1712.
- [22] Fernando G. S. L. Brandao, *Entanglement Theory and the Quantum Simulation of Many-Body Physics*, Ph.D. thesis, Im-

- perial College (2008), arXiv:0810.0026.
- [23] Tobias Moroder, Marcos Curty, and Norbert Lütkenhaus, “One-way quantum key distribution: Simple upper bound on the secret key rate,” *Physical Review A* **74**, 052301 (2006), arXiv:quant-ph/0603270.
- [24] Patrick Hayden, Kevin Milner, and Mark M. Wilde, “Two-message quantum interactive proofs and the quantum separability problem,” in *Proceedings of the 28th IEEE Conference on Computational Complexity* (Palo Alto, California, USA, 2013) pp. 156–167, arXiv:1211.6120.
- [25] Francesco Buscemi and Nilanjana Datta, “The quantum capacity of channels with arbitrarily correlated noise,” *IEEE Transactions on Information Theory* **56**, 1447–1460 (2010), arXiv:0902.0158.
- [26] Ligong Wang and Renato Renner, “One-shot classical-quantum capacity and hypothesis testing,” *Physical Review Letters* **108**, 200501 (2012), arXiv:1007.5456.
- [27] Nilanjana Datta, “Min- and max-relative entropies and a new entanglement monotone,” *IEEE Transactions on Information Theory* **55**, 2816–2826 (2009), arXiv:0803.2770.
- [28] Nilanjana Datta, “Max-relative entropy of entanglement, alias log robustness,” *International Journal of Quantum Information* **7**, 475–491 (2009), arXiv:0807.2536.
- [29] Graeme Smith, John A. Smolin, and Andreas Winter, “The quantum capacity with symmetric side channels,” *IEEE Transactions on Information Theory* **54**, 4208–4217 (2008), arXiv:quant-ph/0607039.
- [30] Benjamin Schumacher, “Sending entanglement through noisy quantum channels,” *Physical Review A* **54**, 2614–2628 (1996).
- [31] Benjamin Schumacher and Michael A. Nielsen, “Quantum data processing and error correction,” *Physical Review A* **54**, 2629–2635 (1996), arXiv:quant-ph/9604022.
- [32] Seth Lloyd, “Capacity of the noisy quantum channel,” *Physical Review A* **55**, 1613 (1997), arXiv:quant-ph/9604015.
- [33] Howard Barnum, M. A. Nielsen, and Benjamin Schumacher, “Information transmission through a noisy quantum channel,” *Physical Review A* **57**, 4153–4175 (1998).
- [34] Howard Barnum, Emanuel Knill, and Michael A. Nielsen, “On quantum fidelities and channel capacities,” *IEEE Transactions on Information Theory* **46**, 1317 (2000), arXiv:quant-ph/9809010.
- [35] Peter W. Shor, “The quantum channel capacity and coherent information,” in *Lecture Notes, MSRI Workshop on Quantum Computation* (2002).
- [36] Igor Devetak, “The private classical capacity and quantum capacity of a quantum channel,” *IEEE Transactions on Information Theory* **51**, 44–55 (2005), arXiv:quant-ph/0304127.
- [37] Armin Uhlmann, “The “transition probability” in the state space of a $*$ -algebra,” *Reports on Mathematical Physics* **9**, 273–279 (1976).
- [38] Masahiro Takeoka, Saikat Guha, and Mark M. Wilde, “The squashed entanglement of a quantum channel,” *IEEE Transactions on Information Theory* **60**, 4987–4998 (2014), arXiv:1310.0129.
- [39] Masahiro Takeoka, Saikat Guha, and Mark M. Wilde, “Fundamental rate-loss tradeoff for optical quantum key distribution,” *Nature Communications* **5**, 5235 (2014), arXiv:1504.06390.
- [40] Eneet Kaur and Mark M. Wilde, “Amortized entanglement of a quantum channel and approximately teleportation-simulable channels,” *Journal of Physics A* **51**, 035303 (2018), arXiv:1707.07721.
- [41] Peter D. Johnson and Lorenza Viola, “Compatible quantum correlations: Extension problems for Werner and isotropic states,” *Physical Review A* **88**, 032323 (2013), arXiv:1305.1342.
- [42] Ciara Morgan and Andreas Winter, ““Pretty strong” converse for the quantum capacity of degradable channels,” *IEEE Transactions on Information Theory* **60**, 317–333 (2014), arXiv:1301.4927.
- [43] Filippo Caruso and Vittorio Giovannetti, “Degradability of bosonic Gaussian channels,” *Physical Review A* **74**, 062307 (2006), arXiv:quant-ph/0603257.
- [44] Geir Ove Myhr, *Symmetric extension of bipartite quantum states and its use in quantum key distribution with two-way postprocessing*, Ph.D. thesis, Universität Erlangen-Nürnberg (2010), arXiv:1103.0766.
- [45] Alexander S. Holevo, “Entanglement-breaking channels in infinite dimensions,” *Problems of Information Transmission* **44**, 171–184 (2008), arXiv:0802.0235.
- [46] Jerry M. Chow, A. D. Córcoles, Jay M. Gambetta, Chad Rigetti, B. R. Johnson, John A. Smolin, J. R. Rozen, George A. Keefe, Mary B. Rothwell, Mark B. Ketchen, and M. Steffen, “Simple all-microwave entangling gate for fixed-frequency superconducting qubits,” *Physical Review Letters* **107**, 080502 (2011), arXiv:1106.0553.
- [47] Norbert M. Linke, Dmitri Maslov, Martin Roetteler, Shantanu Deb Nath, Caroline Figgatt, Kevin A. Landsman, Kenneth Wright, and Christopher Monroe, “Experimental comparison of two quantum computing architectures,” *Proceedings of the National Academy of Sciences* **114**, 3305–3310 (2017), arXiv:1702.01852.
- [48] Sean D. Barrett and Thomas M. Stace, “Fault tolerant quantum computation with very high threshold for loss errors,” *Physical Review Letters* **105**, 200502 (2010), arXiv:1005.2456.
- [49] Ilya Dumer, Alexey A. Kovalev, and Leonid P. Pryadko, “Thresholds for correcting errors, erasures, and faulty syndrome measurements in degenerate quantum codes,” *Physical Review Letters* **115**, 050502 (2015), arXiv:1412.6172.
- [50] Alexander S. Holevo, “Remarks on the classical capacity of quantum channel,” (2002), arXiv:quant-ph/0212025, [quant-ph/0212025](https://arxiv.org/abs/quant-ph/0212025).
- [51] Giulio Chiribella, Giacomo Mauro D’Ariano, and Paolo Perinotti, “Realization schemes for quantum instruments in finite dimensions,” *Journal of Mathematical Physics* **50**, 042101 (2009), arXiv:0810.3211, [http://dx.doi.org/10.1063/1.3105923](https://doi.org/10.1063/1.3105923).
- [52] Felix Leditzky, Nilanjana Datta, and Graeme Smith, “Useful states and entanglement distillation,” *IEEE Transactions on Information Theory* (2018), 10.1109/TIT.2017.2776907, arXiv:1701.03081.
- [53] Felix Leditzky, Debbie Leung, and Graeme Smith, “Quantum and private capacities of low-noise channels,” *Physical Review Letters* **120**, 160503 (2018), arXiv:1705.04335.
- [54] Dagmar Bruß, David P. DiVincenzo, Artur Ekert, Christopher A. Fuchs, Chiara Macchiavello, and John A. Smolin, “Optimal universal and state-dependent quantum cloning,” *Physical Review A* **57**, 2368–2378 (1998), arXiv:quant-ph/9705038.
- [55] Nicolas J. Cerf, “Pauli cloning of a quantum bit,” *Physical Review Letters* **84**, 4497–4500 (2000), arXiv:quant-ph/9803058.
- [56] Yury Polyanskiy, H. Vincent Poor, and Sergio Verdú, “Channel coding rate in the finite blocklength regime,” *IEEE Transactions on Information Theory* **56**, 2307–2359 (2010).
- [57] William Matthews and Stephanie Wehner, “Finite blocklength converse bounds for quantum channels,” *IEEE Transactions on Information Theory* **60**, 7317–7329 (2014), arXiv:1210.4722.
- [58] Mark M. Wilde, Marco Tomamichel, and Mario Berta, “Converse bounds for private communication over quantum channels,” *IEEE Transactions on Information Theory* **63**, 1792–1817 (2017), arXiv:1602.08898.
- [59] Siddhartha Das, Stefan Bäuml, and Mark M. Wilde, “En-

- tanglement and secret-key-agreement capacities of bipartite quantum interactions and read-only memory devices,” (2017), arXiv:1712.00827.
- [60] Stefan Bäuml, Siddhartha Das, and Mark M. Wilde, “Fundamental limits on the capacities of bipartite quantum interactions,” *Physical Review Letters* **121**, 250504 (2018), arXiv:1812.08223.